

# MANWAYS

MANWAYS | ACCESS HATCHES | DOORS


## DATA SHEET

Material:- AISI 316L

Finish:- Electropolish  
or  
Beadblast

Seals:- Various  
Available

Pressure  
Ratings:- Maximum  
allowed  
working  
pressure 150°C

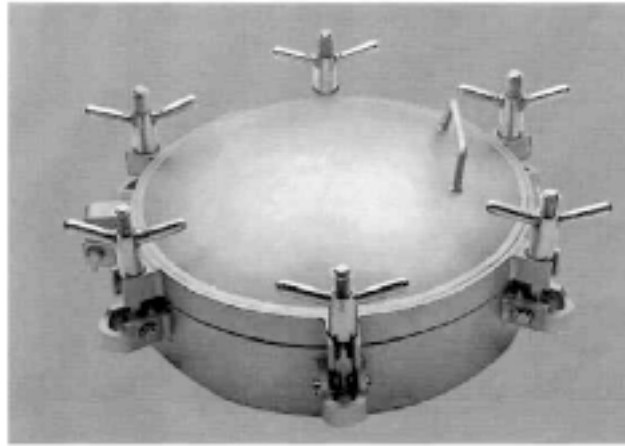

Round External Pressure Doors  
Design & Approval CODAP 2000

Code	Dia.	Pressure Ratings			Vacuum	No of Bolts	Frame Height mm	Weight kg
		CODAP 2000 UDT	ASME	TÜV				
P22-233	204	8			0.1	3	100	16
P22-333	354	4			0.1	3	100	23
P22-354	354	5.6			0.1	4	100	25
P22-433	400	3	3	2.8	0.1	4	100	33
P22-444	400	4.34	6	3.5	0.1	5	100	34
P22-449	400	8.5	8.5	6.4	0.1	9	100	40
P22-443	460	3.6	3.6	2.7	0.1	5	100	37
P22-454	460	4.1	4.1	3.3	0.1	6	100	39
P22-459	460	7.3	7.3	6	0.1	11	100	47
P22-553	500	3.5	3.5	2.7	0.1	6	100	43
P22-564	500	4.5	4.5	3.2	0.1	7	100	44
P22-569	500	7.5	7.5	6	0.1	13	100	54
P22-664	600	3			0.1	7	100	50
P22-667	600	5			0.1	10	100	54
P22-669	600	7			0.1	14	100	58

These doors are supplied to CODAP2000, and complete with PED compliant certification of material and manufacturers calculations.

Extras:-

Spring assisted opening  
Alternative polishing to customer specification  
SYJA System kit for electronic confirmation that the door is closed and swing bolts tight  
Construction to ASME or TUV standards  
Dependant upon order qty, penetrant control, U stamp, or radiography

15 Hillside Works, Whitehall Road, Cleckheaton, West Yorkshire, BD19 4DW

Tel: 01274 852752 Fax: 01274 852778

Email: sales@manways.co.uk