


## Round External Pressure Doors - PED Approved

P22-233




Material:	316L
Finish:	Electropolish, beadblast or to customers specification
Seal:	EPDM as standard, various alternatives available
	Full Vacuum
Pressure Rating:	Maximum allowed working pressure at 150°C

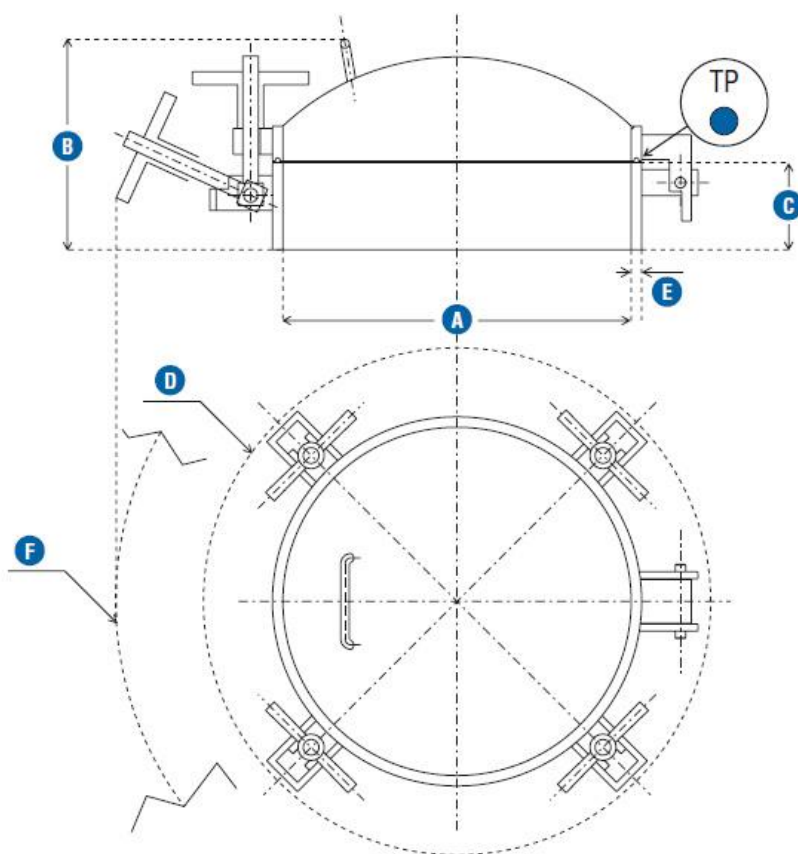







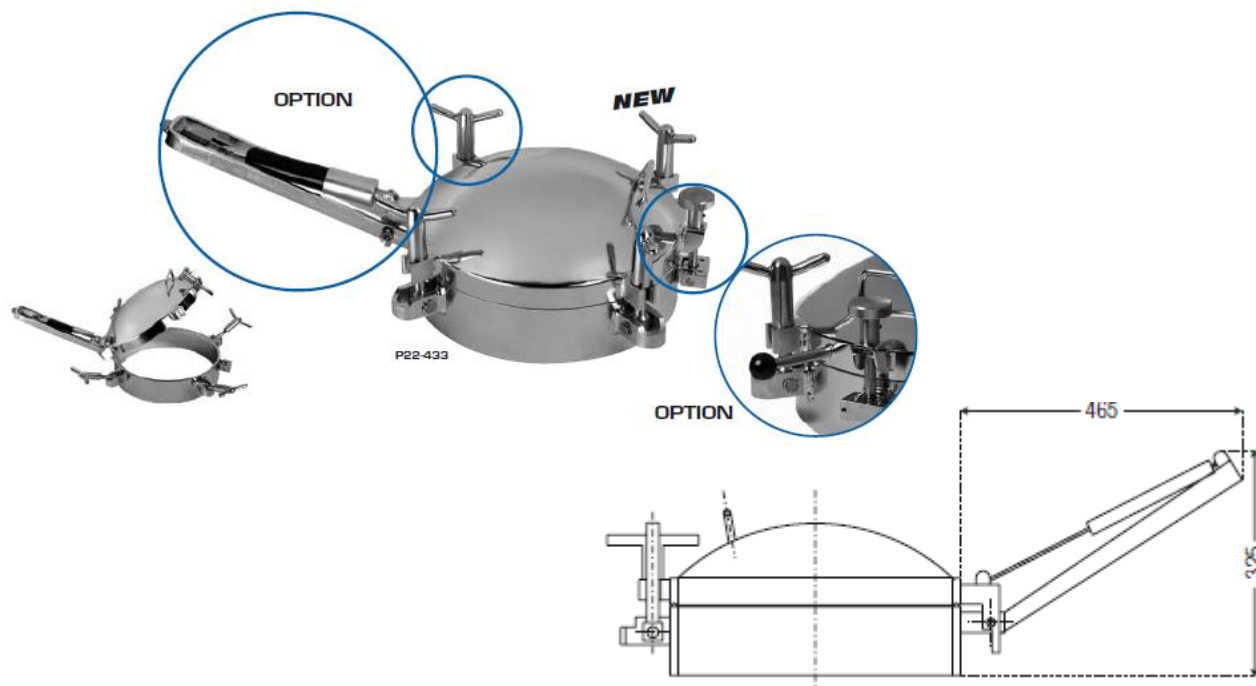












- These doors are supplied to CODAP 2000 and are complete with PED complaint certification of material and manufacturers calculation.
- Extras available are spring assisted opening, SYJA System, construction to ASME or TUV standards.

This Data Sheet refers to the material as supplied. The information contained herein is given in good faith, but no liability will be accepted by the Company in relation to same. We reserve the right to change the details given on this Data Sheet as additional information is acquired. Customers requiring the latest version of this Data Sheet should contact our sales department.

Unit N2, Gildersome Spur, Gildersome, Leeds, LS27 7JZ | Tel: 0113 252 6712 | Email: [info@manways.co.uk](mailto:info@manways.co.uk) | [www.manways.co.uk](http://www.manways.co.uk)

## Product Datasheet



Code	A	B	C	D	E	F		BAR 150°C			) BAR (		
								CODAP	ASME	TÜV			
P22-233	204	220	100	371	12	558	3	8	-	-	0.1		16
P22-250	250	220	100	424	12	580	3	5	-	-	0.1		19
P22-300	300	220	100	471	12	627	3	4	-	-	0.1		21
P22-333	354	223	100	528	12	680	3	3	-	-	0.1		23
P22-354	354	223	100	528	12	680	4	5	-	-	0.1		25
P22-433	400	241	100	538	12	784	4	3	3	2.8	0.1		33
P22-444	400	241	100	583	12	784	5	4	4	3.5	0.1		34
P22-446	400	241	100	583	12	784	6	5	5	-	0.1		35
P22-449	400	241	100	583	12	784	9	8	8	6.4	0.1		40
P22-443	457	236	100	633	12	841	5	3	3	2.7	0.1		37
P22-454	457	236	100	633	12	841	6	4	4	3.3	0.1		39
P22-459	457	236	100	633	12	841	11	7	7	6	0.1		47
P22-553	500	231	100	671	12	884	6	3	3	2.7	0.1		43
P22-564	500	231	100	671	12	884	7	4	4	3.2	0.1		44
P22-569	500	231	100	671	12	884	13	7	7	6	0.1		54
P22-664	600	232	100	768	12	1004	7	3	3	-	0.1		50
P22-667	600	232	100	768	12	1004	10	5	5	-	0.1		50
P22-669	600	232	100	768	12	1004	14	7	7	-	0.1		58

This Data Sheet refers to the material as supplied. The information contained herein is given in good faith, but no liability will be accepted by the Company in relation to same. We reserve the right to change the details given on this Data Sheet as additional information is acquired. Customers requiring the latest version of this Data Sheet should contact our sales department.

Unit N2, Gildersome Spur, Gildersome, Leeds, LS27 7JZ | Tel: 0113 252 6712 | Email: [info@manways.co.uk](mailto:info@manways.co.uk) | [www.manways.co.uk](http://www.manways.co.uk)